

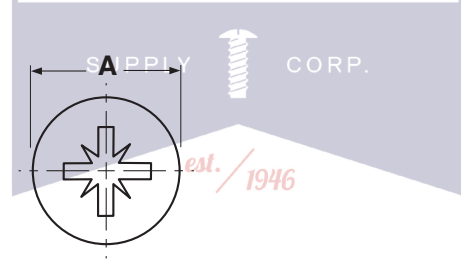
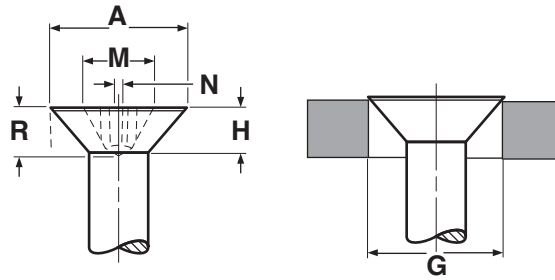


Flat Pozidriv®  
Pan Pozidriv®

# HEAD DIMENSIONS

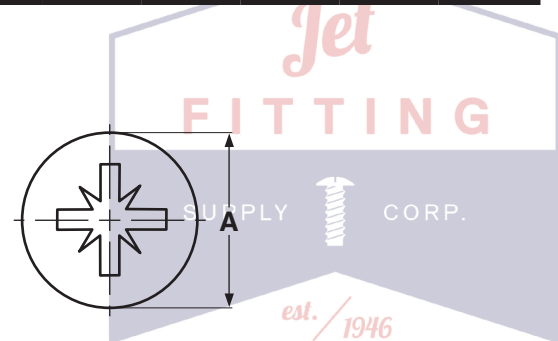

POZIDRIV® (TYPE 1A) FLAT HEADS FOR MACHINE SCREWS												ASME B18.6.3-2010				
Nominal Size	A				H			M	R	N	Recess Penetration Gaging Depth		F		G	Driver Size
	Head Dimensions				Recess Dimensions					Protrusion Above Gaging Diameter		Gaging Diameter				
	Diameter		Height		Diam.	Depth	Width	Max	Min	Max	Min					
	Max	Min	Max	Min	Ref	Ref	Ref	Max	Min	Max	Min					
2	.162	.144	.051	.040	.096	.055	.029	.053	.037	.029	.017	.124	1			
4	.212	.191	.067	.055	.122	.081	.030	.079	.063	.032	.019	.172	1			
6	.262	.238	.083	.069	.168	.098	.041	.091	.073	.036	.021	.220	2			
8	.312	.285	.100	.084	.182	.112	.041	.107	.089	.039	.023	.267	2			
10	.362	.333	.116	.098	.198	.127	.041	.122	.104	.042	.025	.313	2			
12	.412	.380	.132	.112	.262	.149	.056	.136	.118	.045	.027	.362	3			
1/4	.477	.442	.153	.131	.276	.164	.057	.151	.133	.050	.029	.424	3			
5/16	.597	.556	.191	.165	.358	.211	.086	.193	.175	.057	.034	.539	4			
3/8	.717	.670	.230	.200	.386	.239	.086	.222	.204	.065	.039	.653	4			



POZIDRIV® (TYPE 1A) PAN HEADS FOR MACHINE SCREWS												ASME B18.6.3-2010	
Nominal Size	A		H		M		G		N	Recess Penetration Gaging Depth		Driver Size	
	Head Diameter		Height of Head		Dimensions of Recess					Recess Penetration Gaging Depth			
					Diameter		Depth		Width	Max	Min		
	Max	Min	Max	Min	Max	Min	Max	Min	Min	Max	Min		
2	.167	.155	.062	.053	.104	.091	.064	.048	.028	.053	.037	1	
4	.219	.205	.080	.070	.122	.109	.083	.067	.029	.072	.056	1	
6	.270	.256	.097	.087	.162	.149	.092	.074	.040	.076	.058	2	
8	.322	.306	.115	.105	.177	.164	.108	.090	.041	.092	.074	2	
10	.373	.357	.133	.122	.193	.180	.124	.106	.041	.108	.090	2	
12	.425	.407	.151	.139	.254	.241	.139	.121	.056	.117	.099	3	
1/4	.492	.473	.175	.162	.273	.260	.159	.141	.057	.137	.119	3	

Pozidriv® is a registered trademark of the Phillips Screw Company. Our Type-1A drive fasteners are not manufactured by or connected with the producer of Pozidriv® screws.