



Sockets

Socket Cap Screws

Alloy &
Stainless

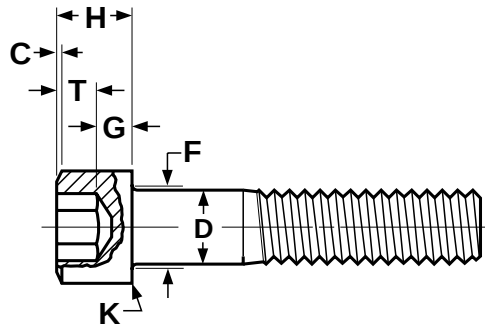

SUPPLY

CORP.

est. / 1946

SOCKET HEAD CAP SCREWS

ASME B18.3-1998

Screw Diam.	D		A		H		C	J	F		T	G	K
	Body Diameter		Head Diameter		Head Height		Top Chamfer or Radius	Hex Socket Size	Fillet Transition Diameter		Key Engage- ment	Wall Thick- ness	Bottom Chamfer or Radius
	Max	Min	Max	Min	Max	Min	Max	Nom	Max	Min	Min	Min	Max
0	0.0600	0.0568	0.096	0.091	0.060	0.057	0.004	0.050	0.074	0.063	0.025	0.020	0.007
1	0.0730	0.0695	0.118	0.112	0.073	0.070	0.005	1/16	0.087	0.076	0.031	0.025	0.007
2	0.0860	0.0822	0.140	0.134	0.086	0.083	0.008	5/64	0.102	0.090	0.038	0.029	0.007
3	0.0990	0.0949	0.161	0.154	0.099	0.095	0.008	5/64	0.115	0.103	0.044	0.034	0.007
4	0.1120	0.1075	0.183	0.176	0.112	0.108	0.009	3/32	0.130	0.118	0.051	0.038	0.008
5	0.1250	0.1202	0.205	0.198	0.125	0.121	0.012	3/32	0.145	0.132	0.057	0.043	0.008
6	0.1380	0.1329	0.226	0.218	0.138	0.134	0.013	7/64	0.158	0.145	0.064	0.047	0.008
8	0.1640	0.1585	0.270	0.262	0.164	0.159	0.014	9/64	0.188	0.173	0.077	0.056	0.008
10	0.1900	0.1840	0.312	0.303	0.190	0.185	0.018	5/32	0.218	0.202	0.090	0.065	0.008
1/4	0.2500	0.2435	0.375	0.365	0.250	0.244	0.025	3/16	0.278	0.262	0.120	0.095	0.010
5/16	0.3125	0.3053	0.469	0.457	0.312	0.306	0.033	1/4	0.347	0.329	0.151	0.119	0.010
3/8	0.3750	0.3678	0.562	0.550	0.375	0.368	0.040	5/16	0.415	0.398	0.182	0.143	0.010
7/16	0.4375	0.4294	0.656	0.642	0.438	0.430	0.047	3/8	0.484	0.465	0.213	0.166	0.015
1/2	0.5000	0.4919	0.750	0.735	0.500	0.492	0.055	3/8	0.552	0.532	0.245	0.190	0.015
5/8	0.6250	0.6163	0.938	0.921	0.625	0.616	0.070	1/2	0.689	0.664	0.307	0.238	0.015
3/4	0.7500	0.7406	1.125	1.107	0.750	0.740	0.085	5/8	0.828	0.801	0.370	0.285	0.015
7/8	0.8750	0.8647	1.312	1.293	0.875	0.864	0.100	3/4	0.963	0.933	0.432	0.333	0.020
1	1.0000	0.9886	1.500	1.479	1.000	0.988	0.114	3/4	1.100	1.069	0.495	0.380	0.020
1 1/4	1.2500	1.2336	1.875	1.852	1.250	1.236	0.144	7/8	1.370	1.334	0.620	0.475	0.020
1 1/2	1.5000	1.4818	2.250	2.224	1.500	1.485	0.176	1	1.640	1.602	0.745	0.570	0.020



Tolerance on Length	Nominal Screw Size	Nominal Screw Length			
		Up to 1 in., Incl.	Over 1 in. to 2-1/2 in., Incl.	Over 2-1/2 to 6 in., Incl.	Over 6 in.
	0 thru 3/8, Incl.	-0.03	-0.04	-0.06	-0.12
	7/16 thru 3/4, Incl.	-0.03	-0.06	-0.08	-0.12
	7/8 thru 1-1/2, Incl.	-0.05	-0.10	-0.14	-0.20

est. / 1946

Stainless
Steel

Socket Cap Screws

Sockets



SUPPLY



CORP.

est. / 1946

Jet

MECHANICAL PROPERTIES OF <i>STAINLESS STEEL</i> SOCKET CAP SCREWS							Blue Devil®
Nominal Size	Tensile Strength (lbs., min.)		Yield Strength (lbs., min.)		Body Section Single Shear Strength (lbs., min.)	Tightening Torque (In.-Lbs.)	
	UNRC	UNRF	UNRC	UNRF		UNRC	UNRF
0	-	145	-	72	130	-	1.4
1	-	220	-	111	190	-	2.3
2	295	-	185	-	260	3.8	-
4	480	-	240	-	350	6.0	-
6	725	-	363	-	375	15.0	-
8	1,120	-	560	-	670	28.0	-
10	1,400	1,600	701	800	950	40.0	46.0
1/4	2,550	2,910	1,273	1,455	2,200	95.0	109.0
5/16	4,200	4,645	2,100	2,320	3,450	170.0	188.0
3/8	6,100	7,025	3,100	3,510	4,970	301.0	341.0
1/2	11,350	-	5,675	-	8,840	750.0	-

FITTING

Description	An externally threaded fastener with unified threads, a cylindrical head with a flat chamfered top surface, knurled cylindrical sides and hexagonal recess. It is made from austenitic stainless steel .		
Applications/ Advantages	Although stainless socket cap screws have significantly less tensile and yield strength than alloy sockets, they have superior resistance to corrosion. They retain their mechanical and performance capabilities at higher than ambient temperatures.		
Material	Cap screws shall be made from one of the following stainless alloys: 302, 303, 304, 305, 384, XM1 or XM7.		
Heat Treatment	The austenitic alloys develop their strength through work hardening during the fastener manufacturing process, as seen from the hardness properties below. The only heat treatment normally available on austenitic stainless alloys is annealing, which is done at approximately 1900°F to a dead soft condition and is not normally thermally reversible.		
Hardness	Rockwell B80 minimum		
Cap screws of a length 3D or greater, where D equals the nominal diameter of the screw, are subject to tensile strength, yield strength, elongation and reduction of area testing.			
Tensile Strength		80,000 psi. minimum	
Yield Strength		30,000 psi. minimum	
Elongation		10% minimum (applies to machined specimens of length at least 4D where D equals the nominal diameter of the screw)	
Reduction of Area	R.P.	30% minimum (applies to machined specimens)	

est. / 1946


Sockets

Socket Cap Screws

Length Specifications

BODY AND GRIP LENGTHS OF SOCKET HEAD CAP SCREWS													ASME B18.3-1998					
Nom. Size D	0		1		2		3		4		5		6		8		10	
Basic Thread Length L _T	0.500		0.625		0.625		0.625		0.750		0.750		0.750		0.875		0.875	
Nominal Length L	L _G	L _B	L _G	L _B	L _G	L _B	L _G	L _B	L _G	L _B	L _G	L _B	L _G	L _B	L _G	L _B	L _G	L _B
	1.00	0.50 0.44	0.25 0.17	0.25 0.17	0.25 0.16	0.25 0.15	0.25 0.12	0.25 0.12										
1.25	0.75 0.69	0.62 0.55	0.62 0.54	0.62 0.52	0.25 0.12	0.25 0.12	0.50 0.34	0.38 0.22	0.38 0.17									
1.50		0.88 0.80	0.88 0.79	0.88 0.77	0.75 0.62	0.75 0.62	0.50 0.34	0.38 0.22	0.38 0.17									
1.75			1.12 1.04	1.12 1.02	0.75 0.62	0.75 0.62	1.00 0.84	0.88 0.72	0.88 0.67									
2.00				1.38 1.27	1.25 1.12	1.25 1.12	1.00 0.84	0.88 0.72	0.88 0.67									
2.25					1.25 1.12	1.25 1.12	1.50 1.34	1.38 1.22	1.38 1.17									
2.50							1.75 1.62	1.50 1.34	1.38 1.17									
2.75								2.00 1.84	1.88 1.72	1.88 1.67								
3.00									1.88 1.72	1.88 1.67								
3.50																	2.38 2.17	

Nom. Size D	1/4		5/16		3/8		7/16		1/2		5/8		3/4		7/8		1	
Basic Thread Length L _T	1.000		1.125		1.250		1.375		1.500		1.750		2.000		2.250		2.500	
Nominal Length L	L _G	L _B	L _G	L _B	L _G	L _B	L _G	L _B	L _G	L _B	L _G	L _B	L _G	L _B	L _G	L _B	L _G	L _B
1.50	0.50	0.25																
1.75	0.50	0.25	0.62	0.35	0.50	0.19												
2.00	1.00	0.75	0.62	0.35	0.50	0.19	0.62	0.27										
2.25	1.00	0.75	1.12	0.85	1.00	0.69	0.62	0.27	0.75	0.36								
2.50	1.50	1.25	1.12	0.85	1.00	0.69	1.12	0.77	0.75	0.36	0.75	0.30						
2.75	1.50	1.25	1.62	1.35	1.50	1.19	1.12	0.77	0.75	0.36	0.75	0.30						
3.00	2.00	1.75	1.62	1.35	1.50	1.19	1.62	1.27	1.50	1.12	0.75	0.30	1.00	0.50				
3.25	2.00	1.75	2.12	1.85	2.00	1.69	1.62	1.27	1.50	1.12	1.50	1.04	1.00	0.50	1.00	0.44		
3.50	2.50	2.25	2.12	1.85	2.00	1.69	2.12	1.77	1.50	1.12	1.50	1.04	1.00	0.50	1.00	0.44	1.00	0.38
4.00	3.00	2.75	2.62	2.35	2.50	2.19	2.62	2.27	2.25	1.86	2.25	1.80	2.00	1.50	1.00	0.44	1.00	0.38
4.50	3.50	3.25	3.12	2.85	3.00	2.69	3.12	2.77	3.00	2.62	2.25	1.80	2.00	1.50	2.00	1.44	2.00	1.38
5.00	4.00	3.75	3.62	3.35	3.50	3.19	3.62	3.27	3.00	2.62	3.00	2.54	3.00	2.50	2.00	1.44	2.00	1.38
5.50			4.12	3.85	4.00	3.69	4.12	3.77	3.75	3.36	3.75	3.30	3.00	2.50	3.00	2.44	3.00	2.38
6.00			4.62	4.35	4.50	4.19	4.62	4.27	4.50	4.12	3.75	3.30	4.00	3.50	3.00	2.44	3.00	2.38
6.50					5.00	4.69	5.12	4.77	4.50	4.12	4.50	4.04	4.00	3.50	4.00	3.44	4.00	3.38
7.00					5.50	5.19	5.62	5.27	5.25	4.86	5.25	4.80	5.00	4.50	4.00	3.44	4.00	3.38
8.00							6.62	6.27	6.00	5.62	6.00	5.54	6.00	5.50	5.00	4.44	5.00	4.38
9.00							7.62	7.27	7.00	6.62	6.75	6.30	7.00	6.50	6.00	5.44	6.00	5.38
10.00									8.00	7.62	7.75	7.30	8.00	7.50	7.00	6.44	7.00	6.38
11.00											9.25	8.80	9.00	8.50	8.00	7.44	8.00	7.38
12.00											10.25	9.80	10.00	9.50	9.00	8.44	9.00	8.38

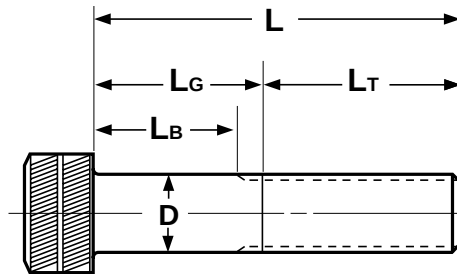

Notes Regarding the Thread Length of Socket Head Cap Screws

- The basic thread lengths (L_T) listed directly below the nominal sizes in the table on page 176 represents the nominal length up to which all screws of that diameter shall be fully threaded.
- To determine the threaded portion of the screws with a nominal length greater than L_T , subtract the minimum design grip length (L_G) from the nominal length (L).
- For screws over 1 in. in diameter and of nominal lengths longer than L_T , the maximum grip gaging length (L_G) and the minimum body length (L_B) of the screws shall be determined as follows:

$$L_G = L - L_T$$

$$L_B = L - L_{TT}$$

Where: L = Nominal length

L_T = Minimum thread length tabulated below

L_{TT} = Maximum total thread length tabulated below

Nominal Size	Min Thread Length (L_T)	Max Total Thread Length (L_{TT})
1-1/4	3.12	5.09
1-1/2	3.75	6.08