


Deck Screws

Type-17

Bugle / Square Recess

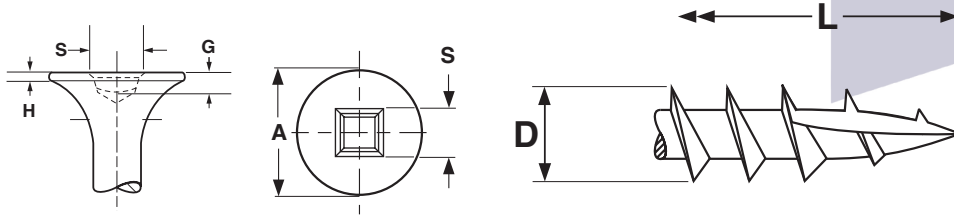

SUPPLY CORP.

est. / 1946

BUGLE HEAD TYPE-17 DECK SCREWS

Nominal Size	Threads per Inch	D		A		H		S		G		Square Recess Driver Size
		Major Diameter		Head Diameter		Head Thickness		Square Recess Drive				
								Recess Square		Depth		
		Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	
6	8 to 10	.158	.142	.347	.315	.031	.020	.106	.090	.071	.055	1
8	8 to 10	.187	.170	.363	.315	.039	.020	.113	.110	.075	.064	2
10	8	.211	.192	.363	.334	.039	.020	.113	.110	.075	.064	2
12	8	.239	.212	.435	.390	.055	.042	.135	.131	.115	.105	3
1/4	8	.270	.240	.472	.450	.058	.047	.135	.131	.115	.105	3
Tolerance on Length		Up to 1" Incl.						Over 1"				
		-0, +0.60						-0, +0.100				

In the absence of a single industry standard for Bugle Head Deck Screws, these dimensions are offered as a guide; slight deviations are acceptable.

SUPPLY CORP.

est. / 1946

Description	A countersunk head screw with a flat top surface, a concave underhead bearing surface with spaced threads. The final 2 to 3 threads taper to an extra sharp point with a chip cavity cut out of approximately 25% of that tapered section.
Applications/ Advantages	Designed specifically for joining pieces of pressure treated lumber. Remains resistant to corrosion for approximately twice as long as do dacroitized steel deck screws. The chip cavity assists in the driving process
Material	18-8 stainless steel
Hardness	Rockwell B 85 - 95
Plating	Stainless deck screws require no additional coating.

SUPPLY CORP.

est. / 1946