
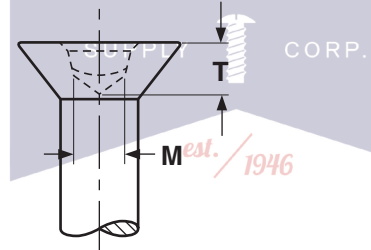
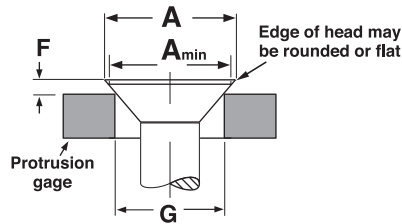


SELF-TAPPING SCREWS

HEAD DIMENSIONS

Square; Flat & Pan





SQUARE RECESS FLAT HEADS

ASME B18.6.3—2013

Nominal Size or Basic Screw Diameter	A		M	F		G	T		Driver Size	
	Head Diameter		Recess Across the Flats	Protrusion Above Gaging Diameter		Gaging Diameter	Recess Penetration Gaging Depth			
	Max	Min	Ref	Max	Min		Max	Min		
4	.1120	.212	.191	.070	.032	.019	0.172	.038	.028	0
6	.1380	.262	.238	.091	.036	.021	0.220	.055	.040	1S
8	.1640	.312	.285	.112	.039	.023	0.267	.063	.048	2S
10	.1900	.362	.333	.112	.042	.025	0.313	.075	.060	2R
12	.2160	.412	.380	.133	.045	.027	0.362	.095	.080	3R
14	.2420	.462	.427	.133	.050	.029	0.410	.095	.080	3R
1/4	.2500	.477	.442	.133	.050	.029	0.424	.095	.080	3R
5/16	.3125	.597	.556	.191	.057	.034	0.539	.100	.085	4R

This type of recess has a square center opening, slightly tapered side walls and a conical bottom.

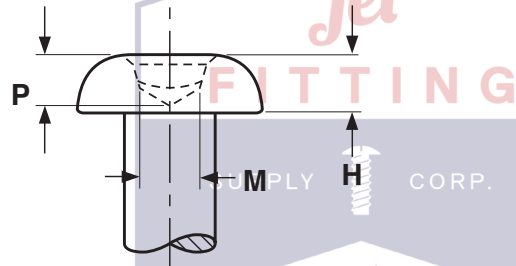

SQUARE RECESS PAN HEADS FOR SELF-TAPPING SCREWS

ASME B18.6.3—2013

Nominal Size or Basic Screw Diameter	A		H		M	Driver Size	P		
	Head Diameter		Head Height		Recess Across Flats		Penetrating Gauging Depth		
	Max	Min	Max	Min	Ref		Max	Min	
2	.0860	.167	.155	.062	.053	.050	00	.033	.028
4	.1120	.219	.205	.080	.070	.070	0	.038	.028
6	.1380	.270	.256	.097	.087	.091	1R	.065	.050
8	.1640	.322	.306	.115	.105	.112	2R	.075	.060
10	.1900	.373	.357	.133	.122	.112	2R	.075	.060
12	.2160	.425	.407	.151	.139	.133	3R	.095	.080
14	.2420	.476	.457	.169	.156	.133	3R	.095	.080
1/4	.2500	.492	.473	.175	.162	.133	3R	.095	.085

This type of recess has a square center opening, slightly tapered side walls and a conical bottom.