



# GO TRAX

## Installing the Scooter Rack


TOOLS REQUIRED: 2.5' Hex Screw (Allen Wrench), 4' Hex Screw (Allen Wrench)

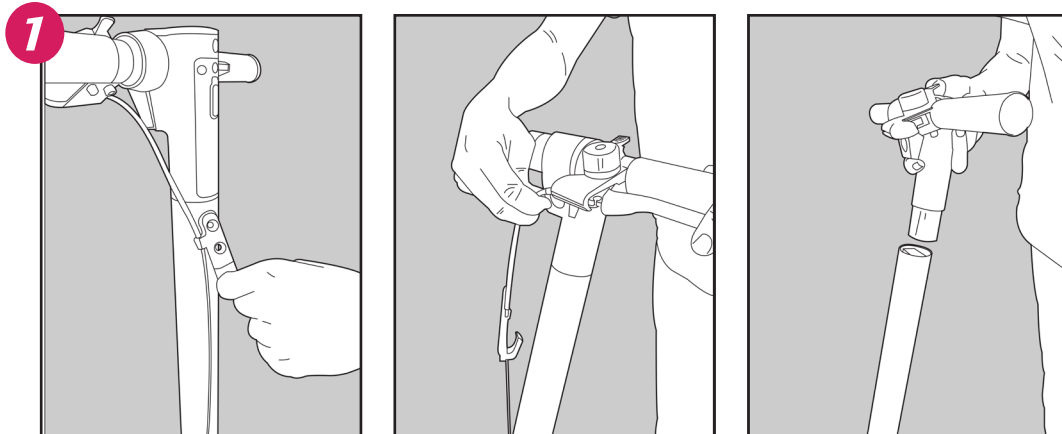

STEP 1: Remove the console handlebar

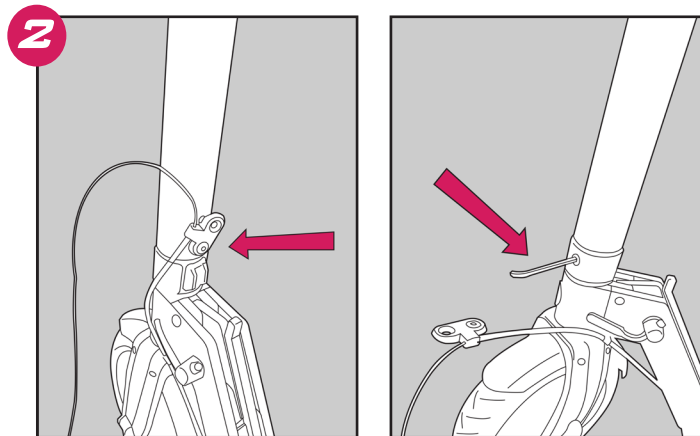

STEP 2: Remove the screws near the fold

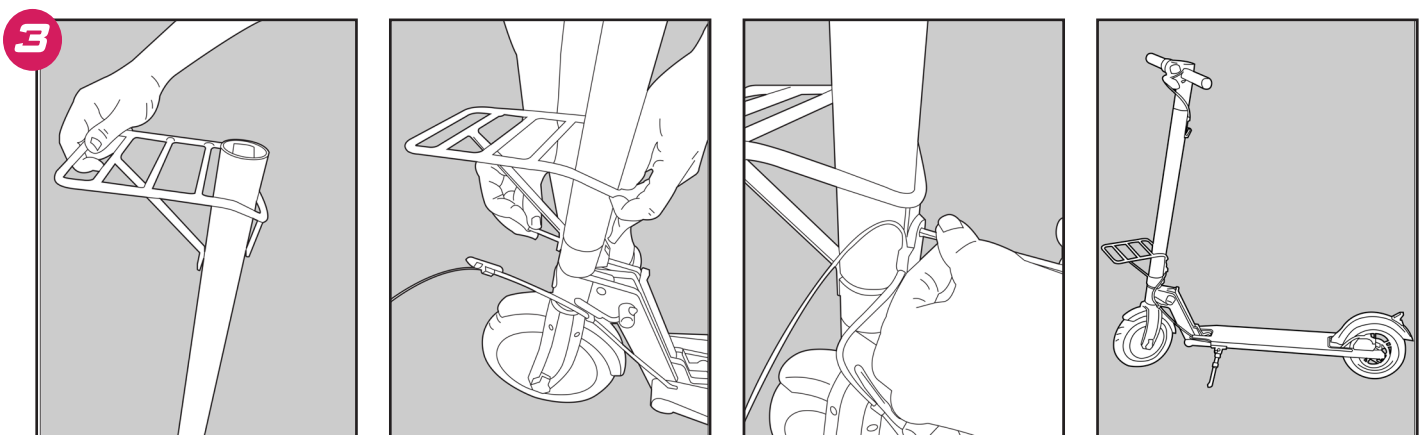

STEP 3: Slide the rack down and screw back into place