


Copernico 500 suspension polished white

1608038A

SPECIFICATIONS



Design By

Carlotta de Bevilacqua

Collection

Design



Specifications

Delivered lumens	1963lm
Light output ratio	85.35lm/W
Power consumption	23W
Led type	21W Array*
CCT (Correlated Color Temperature)	3000K
CRI (Color Rendering Index)	>80
Life expectancy	50000Hrs
Control type	Dimmable 2-Wire
Input Voltage	120-277V
Driver	ADVANCE - 1 x XI050C100V054XPL1

Colors & Finishes

☐ Pol. White RAL9003


Materials

- Made in anodized aluminum

Features & Accessories

- 7 concentric mobile rings obtained from an aluminum plate support a circuit of 384 LEDs
- The rings rotate independently on two different axes enabling light to be directed
- Numerous spatial configurations can be obtained by adjusting the rings as needed
- When the device is closed up it is completely flat
- Also compatible with 0-10V dimming

Dimensions

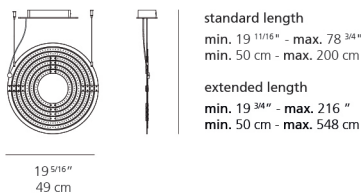


Packaging

1 Box

1 x 21-15/16" x 21-9/16" x 5" / 10.36 lbs - 55.5 cm x 54.5 cm x 12.5 cm / 4.7 kg

Light distribution

Direct/Indirect



Red = Max Cd. Through Vertical plane

Blue = Max Cd. Through Horizontal plane

Luminaire weight

6.17 lbs / 2.8 kg

Warranty

5 year limited warranty,
Upon registration. Click here
to register your purchase.