

Febe wall/ceiling 3000K dove grey

0241328A

SPECIFICATIONS



Design By

Ernesto Gismondi
Daniele Moioli

Collection

Design



Specifications

Delivered lumens	2238lm
Light output ratio	76lm/W
Power consumption	29.44W
Led type	4X25.2W Array*
CCT (Correlated Color Temperature)	3000K
CRI (Color Rendering Index)	>90
Life expectancy	50000Hrs
Control type	Dimmable 2-Wire**
Input Voltage	120-277V
Driver	HATCH - 1 x XTC32-0700P-UNV-I

**Reverse or forward phase (120v only)

Colors & Finishes

Dove grey


Materials

- Body in injection-molded plastic
- Diffuser in injection-molded polycarbonate

Features & Accessories

- A uniform light disc protrudes from the ceiling/wall surface
- Colored frame only visible from the side of the fixture

Dimensions

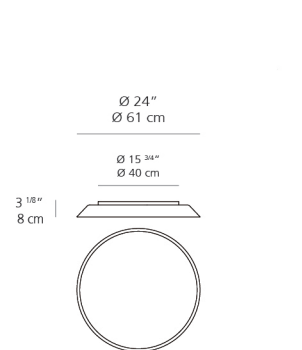

Packaging

1 Box

1 x 27-5/8" x 27-5/8" x 6-13/16" / 15.65 lbs - 70 cm x 70 cm x 17 cm / 7.1 kg

Light distribution

Direct

Luminaire weight

11.02 lbs / 5 kg

Warranty

5 year limited warranty,
Upon registration. Click here
to register your purchase.