

Logico Garden triple floor

T416700W08

SPECIFICATIONS



Design By

Michele De Lucchi
Daniele Moioli

Collection

Outdoor



Colors & Finishes

Anthracite grey

Materials

- Pole in extruded aluminum
- Head with lighting module in die-cast aluminum
- Reflector in metallic polycarbonate
- Screen in highly transparent polycarbonate with shock-resistant and anti-UV finish
- Base in painted aluminum


Specifications

Delivered lumens	294lm
Light output ratio	19.6lm/W
Power consumption	15W
Led type	14W Array*
CCT (Correlated Color Temperature)	3000K
CRI (Color Rendering Index)	>80
Life expectancy	50000Hrs
Control type	On/Off
Input Voltage	120V
Driver	MEAN WELL - 3 x APC-16-350
BUG Rating	B0-U2-G0

Features & Accessories

- Designed for garden or pedestrian lighting
- Base contains holes for ground fixing by means of screws
- Provided with cable and IP68 connector
- Electronic driver integrated
- Standard non dimmable
- For dimming options, please consult with your Artemide Sales Representative

Dimensions

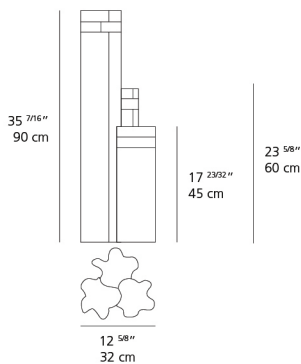

Packaging

4 Boxes

1 x 15-13/16" x 15-13/16" x 4" / 8.11 lbs - 40 cm x 40 cm x 10 cm / 3.68 kg

1 x 9-15/16" x 9-15/16" x 28-5/8" / 10.58 lbs - 25 cm x 25 cm x 72.5 cm / 4.8 kg

1 x 9-15/16" x 9-15/16" x 28-5/8" / 12.13 lbs - 25 cm x 25 cm x 72.5 cm / 5.5 kg

1 x 8-15/16" x 8-15/16" x 40-5/8" / 15.65 lbs - 22.5 cm x 22.5 cm x 103 cm / 7.1 kg

Light distribution


Diffused

Luminaire weight

35.32 lbs / 16.02 kg

Warranty

5 year limited warranty,
Upon registration. Click here
to register your purchase.



Red = Max Cd. Through Vertical plane

Blue = Max Cd. Through Horizontal plane