

# Minispot wall/floor 10° 3000K

NL702910K0UL

## SPECIFICATIONS



### Design By

Ernesto Gismondi

### Collection

Outdoor



### Specifications

Delivered lumens	79lm
Light output ratio	39.5lm/W
Power consumption	2W
Led type	2W Array*
CCT (Correlated Color Temperature)	3000K
CRI (Color Rendering Index)	>80
Life expectancy	50000Hrs
Control type	On/Off
Input Voltage	700mA
Driver	Remote power supply (sold separately)
BUG Rating	B0-U0-G0

### Colors & Finishes

Silver/Grey


### Materials

- Body in aluminum
- Diffuser in transparent polycarbonate

### Features & Accessories

- Supplied with 3 1/2 feet (107 cm) of wire
- Standard non dimmable
- For ground installation, a spike can be ordered separately
- For dimming options, please consult with your Artemide Sales Representative
- 700mA supply required (remote driver sold separately)
- Ground spike (NL97150UL)
- Remote Driver 18W (NLA0100003)

### Dimensions

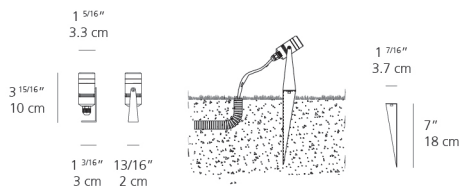


### Packaging

1 Box

1 x 7-15/16" x 7-15/16" x 6-13/16" / .79 lbs - 20 cm x 20 cm x 17 cm / .36 kg

### Light distribution

Direct



Red = Max Cd. Through Vertical plane

Blue = Max Cd. Through Horizontal plane

### Luminaire weight

.42 lbs / .19 kg

### Warranty

5 year limited warranty,  
Upon registration. Click [here](#)  
to register your purchase.