

Reeds single floor IP67

T087408

SPECIFICATIONS



Design By

Klaus Begasse

Collection

Outdoor



Colors & Finishes

- ☐ Transparent (Rods)
- ☒ Anthracite grey (Base)

Materials

- 7 transparent rods in PMMA
- Base made of a polycarbonate casing installed between 2 aluminum plates and anti-scratch support feet
- Gasket made in silicone


Specifications

Delivered lumens	79lm
Light output ratio	8.78lm/W
Power consumption	9W
Led type	7X8.5W Array*
CCT (Correlated Color Temperature)	3000K
CRI (Color Rendering Index)	>80
Life expectancy	50000Hrs
Control type	On/Off
Input Voltage	120V
Driver	TCI - 1 x DCC-15W-350MA/US
BUG Rating	B0-U3-G0

Features & Accessories

- Water sealing is assured by a gasket
- Fixture can be fastened to floor by means of holes in the lower plate
- Complete with integrated driver
- Supplied with a 4'11"-long H05RN-F 2x1 cable
- Standard non dimmable
- For dimming options, please consult with your Artemide Sales Representative

Dimensions

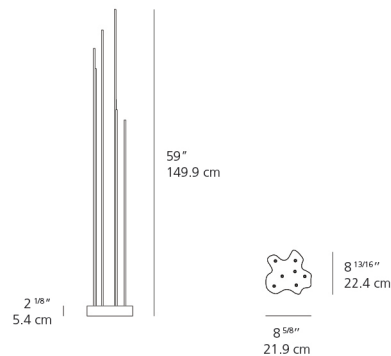

Packaging

2 Boxes

1 x 15-7/16" x 15-7/16" x 8-5/16" / 6.17 lbs - 39 cm x 39 cm x 20.8 cm / 2.8 kg


1 x 61-1/8" x 2-1/4" x 2-1/4" / 1.96 lbs - 155 cm x 5.5 cm x 5.5 cm / .89 kg

Light distribution

Indirect

Luminaire weight

5.58 lbs / 2.53 kg



Red = Max Cd. Through Vertical plane
Blue = Max Cd. Through Horizontal plane

Warranty

5 year limited warranty,
Upon registration. Click here
to register your purchase.