

Reeds single floor IP68

T087508

SPECIFICATIONS



Design By

Klaus Begasse

Collection

Outdoor



Specifications

Delivered lumens	N/A
Light output ratio	N/A
Power consumption	9.5W
Led type	7X1.2W Array*
CCT (Correlated Color Temperature)	3000K
CRI (Color Rendering Index)	>80
Life expectancy	50000Hrs
Control type	On/Off
Input Voltage	N/A
Driver	Remote power supply (sold separately)
BUG Rating	B0-U3-G0

Colors & Finishes

- Transparent (Rods)
- Anthracite grey (Base)


Materials

- Technopolymer aesthetic cover
- Base made up of a polycarbonate casing installed between 2 AISI316 stainless steel plates by AISI316 stainless steel screws
- Gasket made in silicone

Features & Accessories

- Water sealing is assured by a gasket
- Fixture can be fastened to floor by means of holes in the lower plate
- Supplied with a 4'11"-long H05RN-F 2x1 cable
- Remote driver sold separately
- Remote Driver 12W Dimmable 0-10V (AO0100001)
- Remote Driver 14W Dimmable 2-Wire (AO0100002)

Dimensions

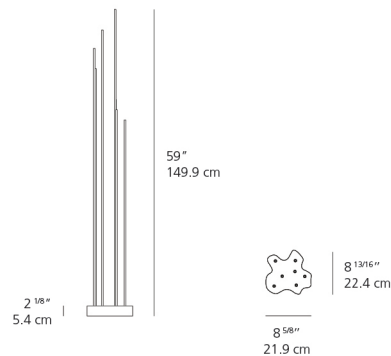

Packaging

2 Boxes

1 x 15-7/16" x 15-7/16" x 8-5/16" / 6.17 lbs - 39 cm x 39 cm x 20.8 cm / 2.8 kg


1 x 61-1/8" x 2-1/4" x 2-1/4" / 1.96 lbs - 155 cm x 5.5 cm x 5.5 cm / .89 kg

Light distribution

Indirect

Luminaire weight

5.58 lbs / 2.53 kg



Warranty

5 year limited warranty, Upon registration. Click here to register your purchase.

Red = Max Cd. Through Vertical plane

Blue = Max Cd. Through Horizontal plane