

# Tolomeo micro LED floor

## SPECIFICATIONS

TOL0126



### Design By

Michele De Lucchi  
Giancarlo Fassina

### Collection

Design



### Specifications

Delivered lumens	297lm
Light output ratio	30.9lm/W
Power consumption	9.6W
Led type	8W Array*
CCT (Correlated Color Temperature)	3000K
CRI (Color Rendering Index)	>80
Life expectancy	50000Hrs
Control type	DIMMABLE (On Cord)
Input Voltage	120-240V
Driver	Plug-In

### Colors & Finishes

Aluminum


### Materials

- Arms and diffuser in aluminum
- Joints and tension control knobs in polished die-cast aluminum
- Tension cables in stainless steel
- Floor support base in weighted steel with stamped aluminum cover
- Stem in steel

### Features & Accessories

- Fully adjustable, articulated arm structure
- Tiltable and rotatable diffuser (90 degrees in both directions)
- Interchangeable plug options accommodate most electrical outlets for global diversity

### Dimensions

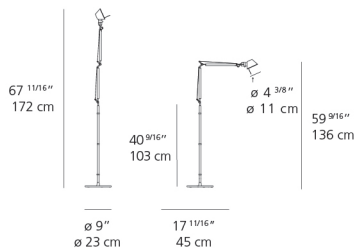

### Packaging

3 Boxes


1 x 8-3/8" x 8-3/8" x 20-3/16" / 2.28 lbs - 21 cm x 21 cm x 51 cm / 1.036 kg

1 x 1-1/4" x 1-1/4" x 45-3/4" / 1.98 lbs - 3 cm x 3 cm x 116 cm / .9 kg

1 x 11-1/8" x 11-1/8" x 4" / 9.7 lbs - 28 cm x 28 cm x 10 cm / 4.4 kg

### Light distribution

Direct



Red = Max Cd. Through Vertical plane

Blue = Max Cd. Through Horizontal plane

### Luminaire weight

11.72 lbs / 5.32 kg

### Warranty

5 year limited warranty,  
Upon registration. Click here  
to register your purchase.