



Thank you for purchasing the MRL Rogue Headlamps from Justice Off Road. For your convenience we have made a simple instruction sheet to make your installation easier. [This information is strictly a guide for ease of installation as there are many available options for installation.](#)

If you ordered your headlamps for a **Jeep Wrangler TJ (1996-2006)** your headlamp replacement will not require any modification or additional harness. If you ordered your headlamps for a **Jeep Wrangler JK (2007-present)** you will need the optional H4 to H13 adapter harness for your installation.

**** Prior to installation, disconnect negative battery terminal ****

The main difference in the MRL Rogue Headlamps is the option for having "Daytime Running Lights" (DRL's). Once you have opened and inspected your headlamps, you will notice that the wiring harness coming from your new headlamps is equipped with an H4 harness (figure 1)

(figure 1)



(figure 2)



Notice that there is an additional wire (female blade connector), this your DRL power feed. If you wish to use the DRL option, this wire will need to be connected to a 12 volt ignition switch lead. Suggestion: The 12 volt cigarette lighter plug (ignition switch) located inside the cab of your Jeep is a good source of power for your DRL's. Locate the feed wire to the

cigarette lighter plug directly behind the dash and splice into this power source using a "scotch" type connector (not included) (figure 2).

Prior to installing your Rogue LED Headlamps you will need to disconnect the front turn signal lamps located in the front grill (figure 3). Then remove the six plastic pins located along the top of the grill (figure 4).

figure 3



figure 4



Next work the grill loose as there are several small clips across the lower section of the grill. Once the grill is removed, set it aside. Using a Torx T-15 driver, remove the four torx screws from the headlight ring.

Jeep TJ – Unplug old headlamp from H4 wiring harness, plug in new headlamp and connect DRL wire and re-install headlight ring.


Jeep JK - Unlock the H13 wiring harness clip and unplug old headlamp. Plug H4 / H13 wiring harness into existing JK wiring harness and secure. Plug H4 male connector from the new Rogue Headlamp into the H4 female plug on the H4/H13 harness and secure. Connect DRL wire. Align and re-install new headlamp and secure using the Torx screws and headlamp ring.

Test headlamp operation/function.

Re-install front grill assembly and turn signals.

Re-connect negative battery terminal

Installation is complete.

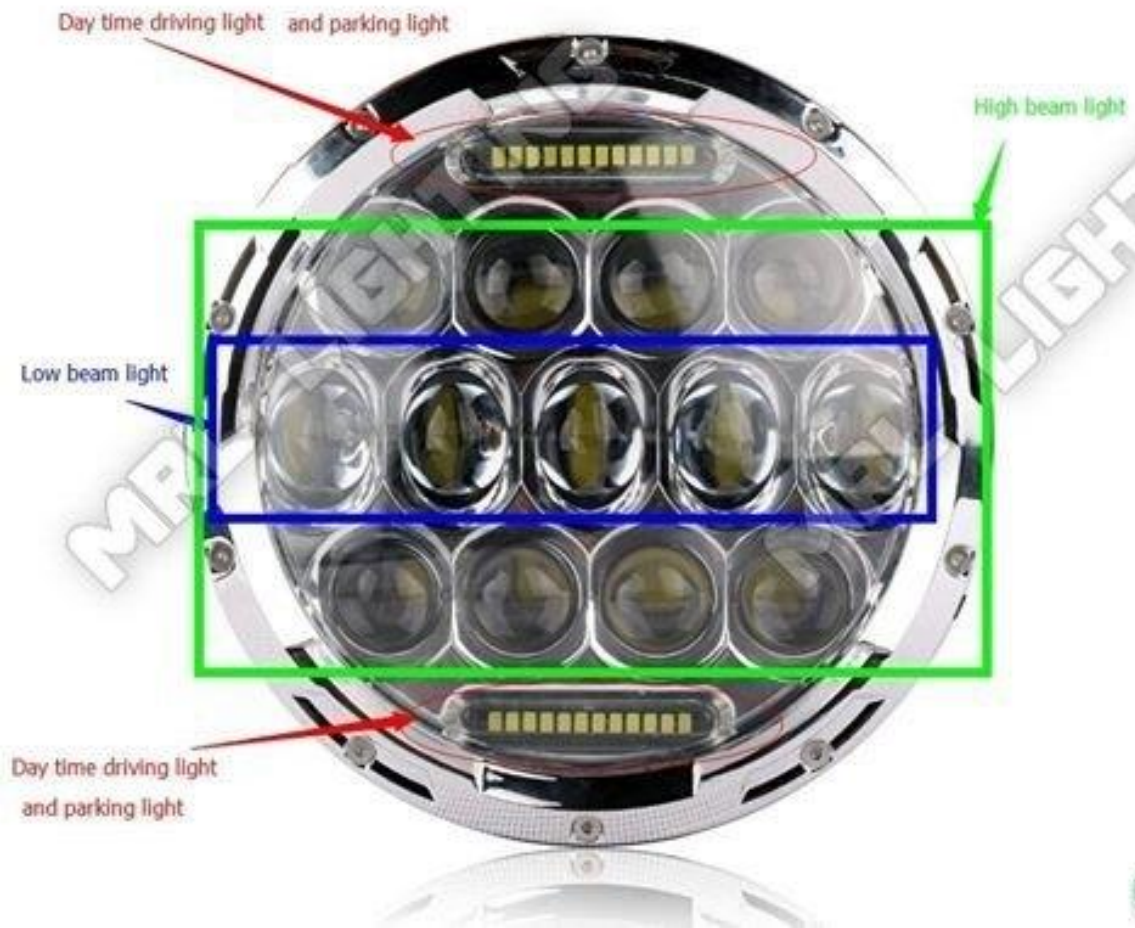

BEAM PATTERN

HOLD HARMLESS AGREEMENT 1. In purchasing this product, I release, waive, discharge and agree not to sue Justice Off Road, LLC's officers, servants, agents, or employees (hereinafter referred to as Releasees) from any and all liability, claims, demands, actions and causes of action whatsoever arising out of or related to any loss, damage, or injury, including death, that may be sustained by me (or anyone else), any property belonging to me (or anyone else), whether caused by the negligence of the releasees or otherwise, while working on, using or any activity related to this product. 2. I am fully aware of risks and hazards connected with the use of a this product and I elect to voluntarily engage in such use of this product knowing that the use may be hazardous to me and my property. I voluntarily assume full responsibility for any risks of loss, property damage or personal injury, including death, that may be sustained by me (or anyone else), or any loss or damage to property owned by me (or anyone else), as a result of using this product, whether caused by the negligence of releasees or otherwise. 3. I further agree to indemnify and hold harmless the releasees from any loss, liability, damage or costs, including court cost and attorney fees, that they may incur due to my use of a this product, whether caused by negligence of releasees or otherwise. 4. It is my express intent that this Release and Hold Harmless Agreement shall bind the members of my family and spouse, if I am alive, and my heirs assigns and personal representative, if I am deceased, and shall be deemed as a release, waiver, discharge, and covenant not to sue the above named releasees. I further agree that this Waiver of Liability and Hold Harmless Agreement shall be construed in accordance with the laws of the State of Maryland. By accepting this product, I acknowledge and represent that I have read the above Waiver and Liability and Hold Harmless Agreement, understand it and accept it voluntarily as my own free act and deed; no oral presentations, statements, or inducements, apart from the foregoing written agreement, have been made; I am at least eighteen (18) years of age and fully competent; and I execute this Release for full, adequate and complete consideration fully intending to be bound by same.