

OA-0921-02-01

LTE/GSM/3G Omni Antenna 9dB with bracket and 5m cable



Product Specifications

Frequency: 900/1800/1900/2100MHz

Antenna Type: OMNI

VSWR: <1.9

Gain: 9dBi

Polarization: Linear Vertical

Radiation: Omni

Power: 50W

Cable Connector: SMA

Input Impedance: 50Ω

Cable Length: 5m

Antenna Mount: L Type

Lightening Protection: Direct Ground


Operating temperature: -40 ~ +65°C

Radome Material: Fiberglass


Antenna Color: White

Dimensions: 820 x 19 x 9mm

<p>□A-0921-02-1</p>	<p>900/1800/1900/2100 MHz OMNI 9dBi + CLF200(5M)+SMA PLUG+L TYPE MOUNT</p> <p>Length=5M (Option)</p> <p>CABLE: LOW LOSS CLF200 (Option)</p> <p>820mm</p> <p>19.00</p> <p>16.30</p> <p>100.0</p> <p>152.0</p> <p>1.7</p> <p>86.00</p> <p>6.00</p> <p>SMA MALE (Option)</p>		
1	FREQUENCY RANGE : 900/1800/1900/2100 MHz	8	Antenna Cable : LOW LOSS CLF200 (Option)
2	GAIN : 9 dBi	9	Cable Connector : SMA MALE (Option)
3	VSWR : < 1.9 : 1	10	
4	IMPEDANCE : 50 Ω	11	
5	POLARIZATION : Vertical	12	
6	Dimensions : L820xw19xH19 mm	13	
7	Antenna Type : OMNI		

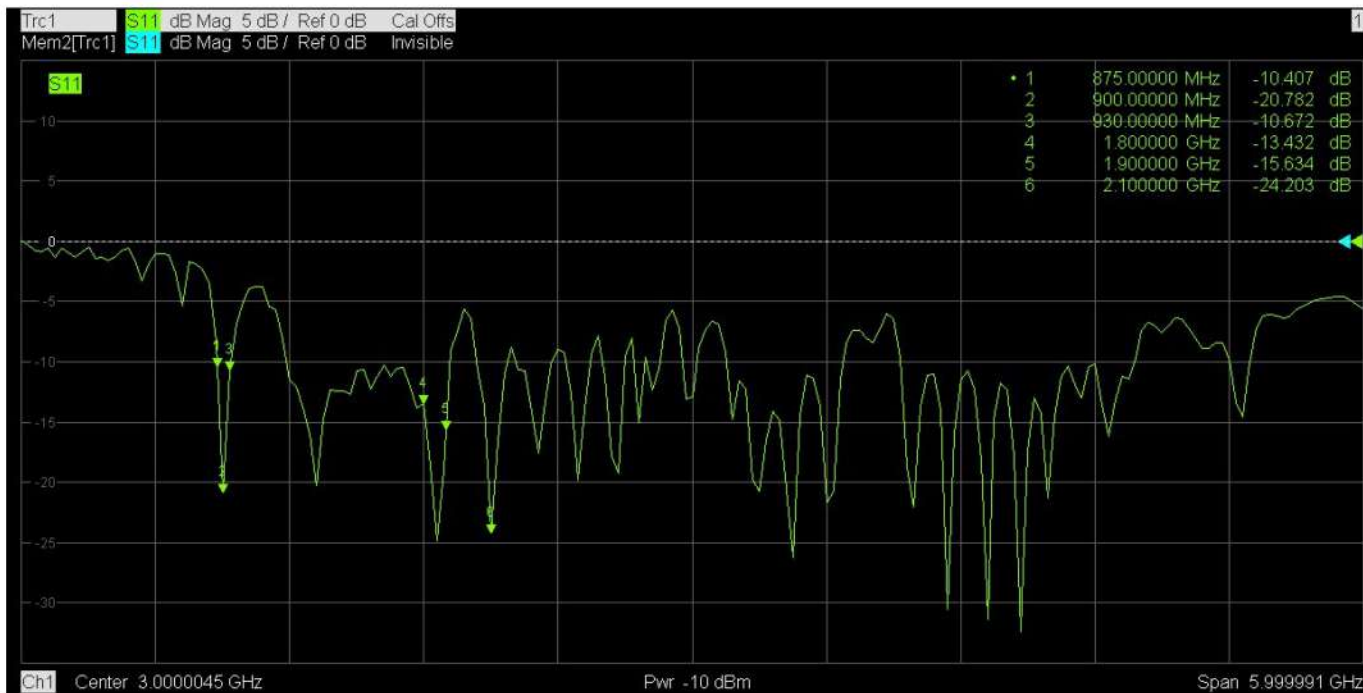

H-Plane

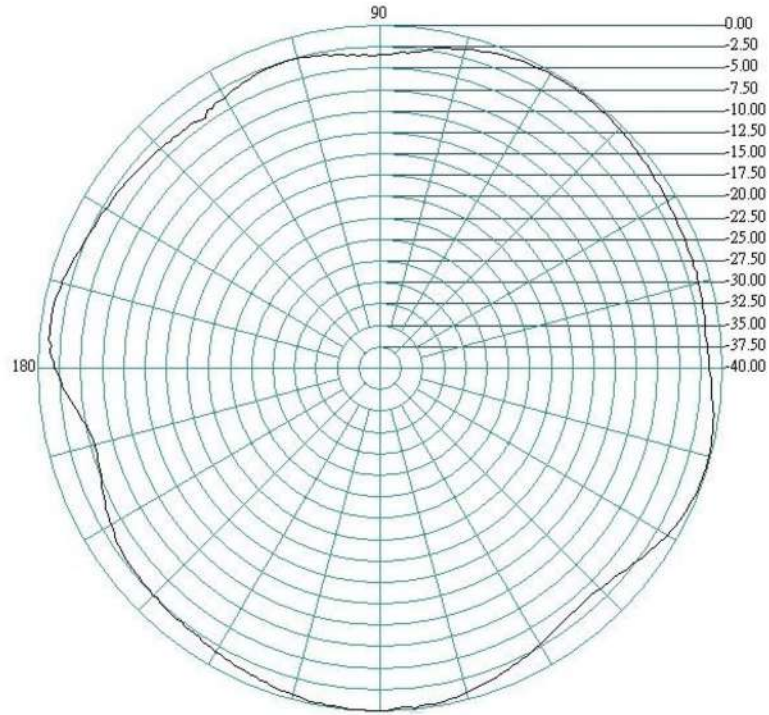

E-Plane

